

Depressurization Testing

CARST presentation 24 April 2018

Don Fugler

Why bother?

- Radon mitigators are adding exhaust equipment to houses
- There may be “spillage-susceptible” appliances in the house
 - Furnaces, water heaters, fireplaces, etc.
- Attached garages can also be a problem with house depressurization
- Testing house depressurization ensures that your radon fan does not create spillage problems

What's most at risk?

- Any appliance with a chimney
 - Gas, oil, wood fuels can create carbon monoxide during combustion
 - Properly vented appliances will keep CO, particles, NOx, and other pollutants out of house air
- Most new gas installations are direct-vented or power-vented, which makes them spillage-resistant
- Some concern about automotive emissions coming in from attached garages
 - E.g. Higher levels of benzene are found in most houses with attached garages

Is there standardized testing?

- CSA F-300-13 Residential Depressurization
- It has two approaches:
 - Initial predicted depressurization calculation
 - Field test in house

Paper test

- Don't bother UNLESS:
 - You are testing a very big, older house, and
 - It has one small bathroom fan
- Otherwise this conservative test will (almost) always fail the house and require the subsequent field test

What are depressurization limits?

- Basically the depressurization at which a venting system will fail
- A bit of a dog's breakfast in F300
- Gas industry pressure on the committee led to gross simplifications
- F300 limits:
 - No limit on direct or power-vented appliances
 - Manufacturer's specified limit on appliance (largely mythical)
 - 5 Pa limit on natural draft appliances (e.g. anything with a chimney)
 - Woodburning appliances may be exempt (or not)
 - Attached garages are referenced as a problem but no depressurization limits are assigned to their existence

The special case of woodburning appliances

- Almost all fireplaces, woodstoves have a chimney
 - Pellet stoves are an exception as many are power-vented
- Depressurization limit would then be 5 Pa
 - Chimneys for woodburning appliances may actually reverse at lower pressures at the end of a long burn
- National Building Code resolves this by saying that woodstoves protected by a smoke alarm and CO alarm do not necessarily need protection against depressurization
 - Recognizes that houses should not have expensive retrofits for combustion appliances that are usually infrequently used

Essence of the F300 test

- Make the house tight (close everything)
- Turn on all big exhaust appliances
 - Any exhaust on continuously
 - Dryer
 - Kitchen range hood (usually)
 - Any fan rated at 75 L/s or greater
- Test pressure difference across the house envelope
- Verify that it is less than depressurization limit

Details

- Best to follow instructions in the standard
- Recommends manometer type and placement
- Discusses wind effects during testing
- Deals with natural stack pressures
- Specifies what to do with:
 - House preparation
 - Furnace circulation fan (off or on)
 - Doors being closed
 - Supply fans (whether they are interconnected or not)


What to watch for as a radon mitigator

- Existing problems: you can be installing a radon system in a house with an existing depressurization problem (e.g. spillage when range hood operates)
 - You do not want your radon fan to be implicated in those events
- Leaky basement floors (and walls in some cases)
 - If you do not seal these, the radon fan may cause high levels of house depressurization

How do you resolve a depressurization problem?

- Maybe a bit beyond your responsibility but ...
- Three basic approaches:
 - Reduce the exhaust capacity
 - Provide make-up air
 - Change out appliances to something with more spillage resistance

Figure C.1
Mitigation solution flowchart
 (See Clause C.1.)

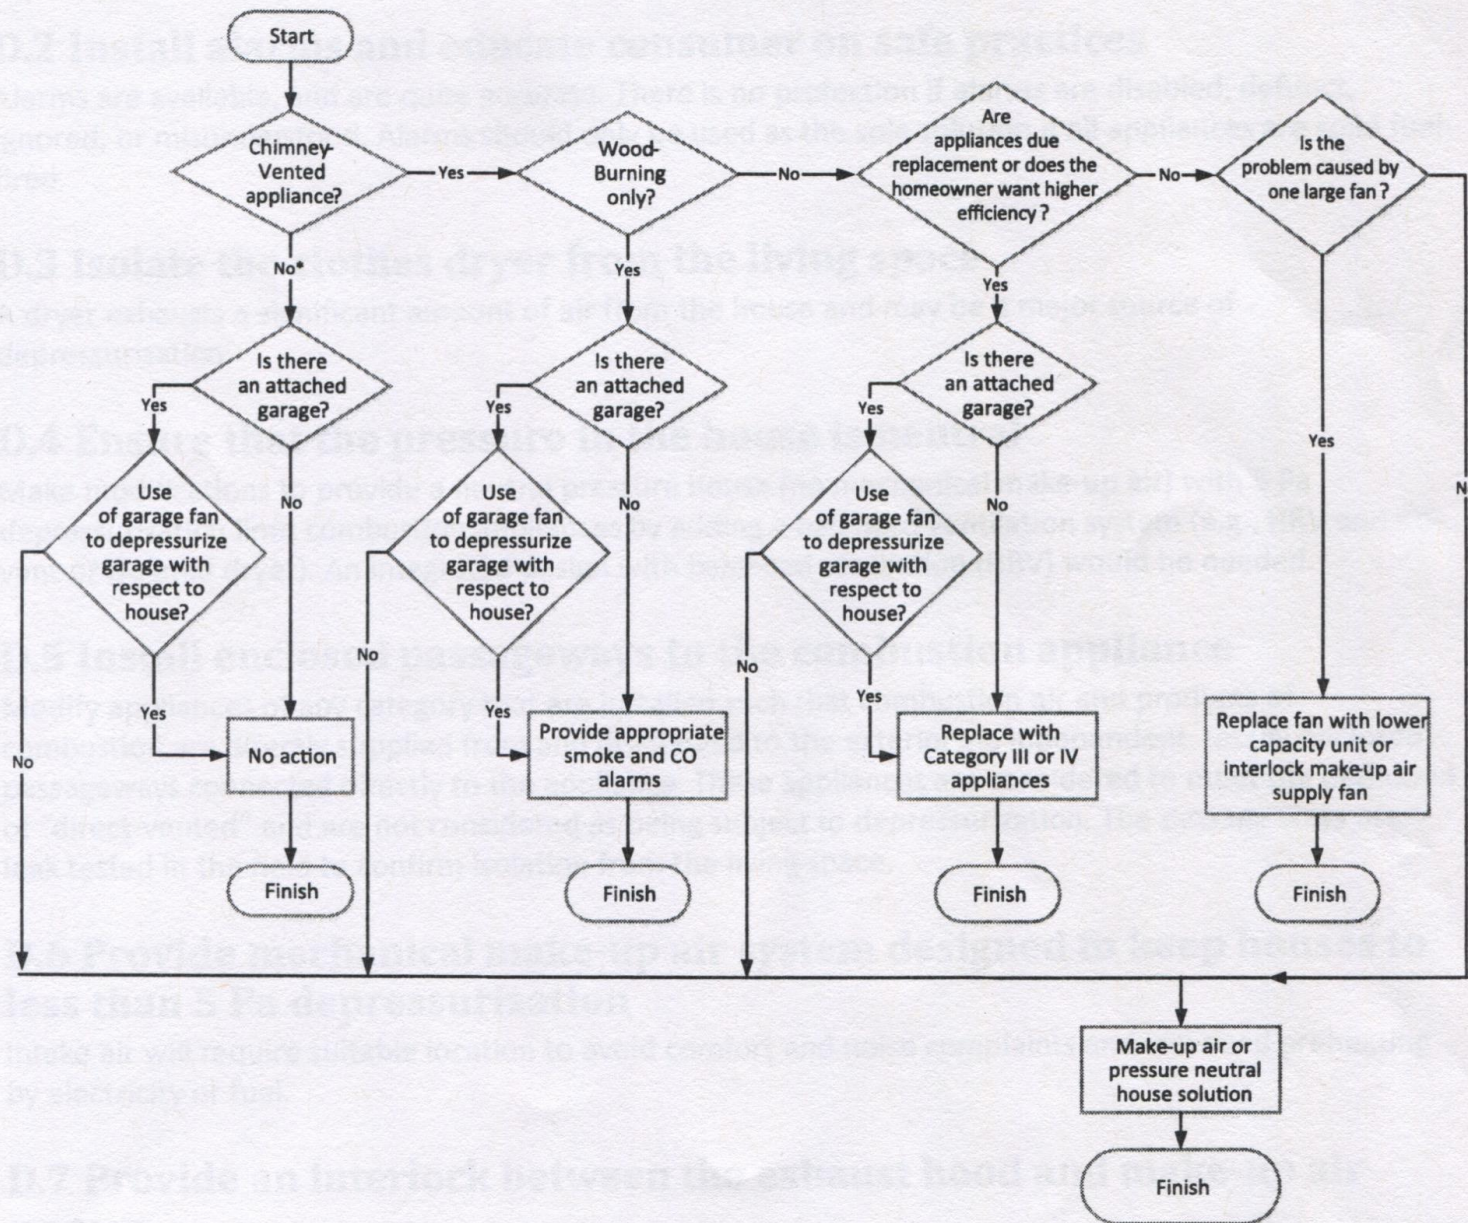

Questions?